

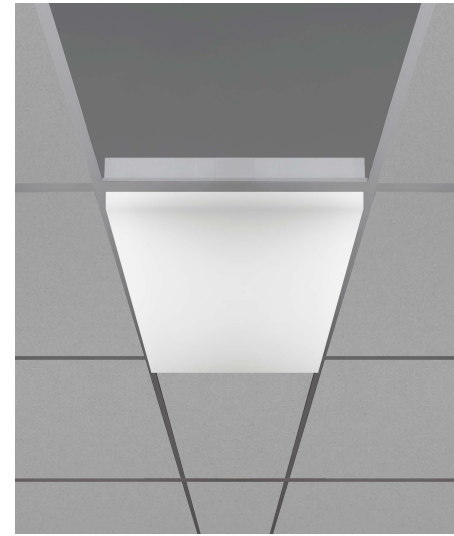
Type: Quantity:

FIXTURE SPECIFICATIONS
INTENDED USE

Built with a Black aluminum housing, our 2x2 LED recessed fixture features sound absorbing acoustic felt ideal for spaces that will benefit from reduced noise. The 11166 can be ordered in a variety of ways: as a non-lit, acoustic felt only product that drops from the ceiling, a LED lit product with acoustic felts that is recessed into the ceiling, an a LED only product. This product can be customized in a number of ways to suit open offices, lobbies and reception areas and corridors, and other commercial interiors.

PRODUCT FAMILY

- 11166: Non-Lit Sound Absorbing Acoustics Fixture
- 11166-P: LED Pendant with Sound Absorbing Acoustics
- 11166-R: LED Regressed Flat Panel with Sound Absorbing Acoustics


FEATURES

Wattage & Color Temperature Switch: Features Field adjustable Wattage and Color temp switch capable of switching wattages from 25 to 40 Watts and color temperatures of 35K to 50K.

Lens: Frosted acrylic diffuser

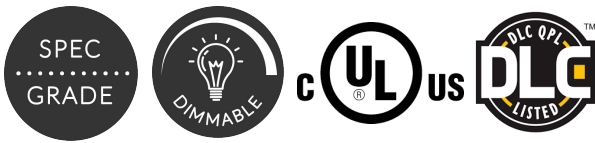
Voltage: 120-277V

Life: 50,000 Hours

Warranty: 5 Years carefree for parts & components (labor not included)

Listings: cULus, DLC, ARRA compliant, BAA compliant

LED	Watts	Color Temp	Lumen Output
Wattage & Color Temperature Selectable	40W	3500K	3828lm
		4000K	3828lm
		5000K	3897lm
	30W	3500K	2949lm
		4000K	2975lm
		5000K	3001lm
	25W	3500K	2523lm
		4000K	2544lm
		5000K	2566lm


ORDERING INFORMATION Example: (11166-AD-2-RT-010)

Model	Size	Mounting	Dimming	Options
11166-AD	1	RT	010 <small>Standard</small>	OS
	1" Acrylic Drop	Recessed T-bar	0-10V Dimming (120-277V)	Bi-Level Occupancy Sensor
	2	FK	ELV	EM8
	2" Acrylic Drop	Flange Kit for Hard Ceiling	ELV Dimming (120-277V)	8W Emergency Back-Up Battery
	4		TRIAC	EM16
4" Acrylic Drop		TRIAC Dimming (120V Only)	16W Emergency Back-Up Battery	
6			EM20	
6" Acrylic Drop			20W Emergency Back-Up Battery	