

FIXTURE SPECIFICATIONS

INTENDED USE

Mounted by pendant, housed in aluminum and finished in white, the vapor-tight LED light offers high-lumens output for high and low bay applications including commercial kitchens, warehouses, fitness spaces and other high to mid-ceiling heights. Our architectural-grade round high bay product includes a 32" safety cord and 78" power cord.

FEATURES

Construction: Aluminum housing with polycarbonate lens

Mounting: Pendant-mount kit includes 32" safety cord and 78" power cord.

Temperature: 5000K Day light

Operating Temperature: 40°F to 113°F (-40°C to 45°C)

Voltage: 20~2 (standard) 200~480V, 50/60Hz (high voltage)

Dimming: 0-10V dimming

CRI: 80+

Lamp Equivalent: 65W BR30

Life: 54,000 hours


Warranty: 5 years free of defects in materials & craftsmanship

Listings: ETL, DLC Premium, IP65, IP69K, NSF



Alcon 11177 LED Half Dome High Bay Light



DIMENSIONS

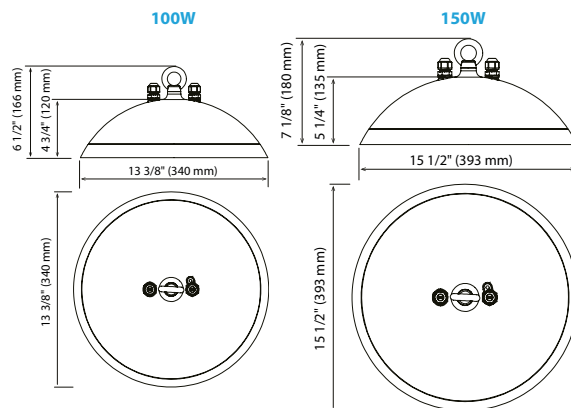



ORDERING INFORMATION Example: (11177-100W)

Model	Diameter Wattage Lumens Voltage
11177	100W 13 Inch 100 Watts 13,069 lum 120-277V
	150WHV 15 Inch 150 Watts 21,356 lum 200-480V



100W | 120~277V

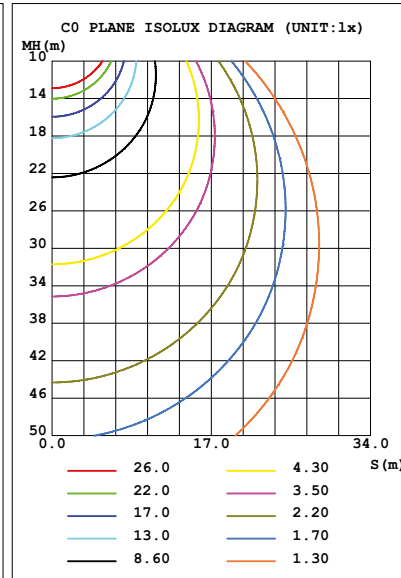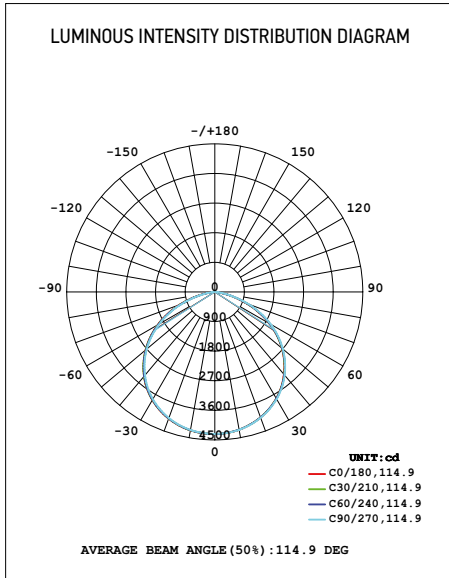

150W | 120~277V

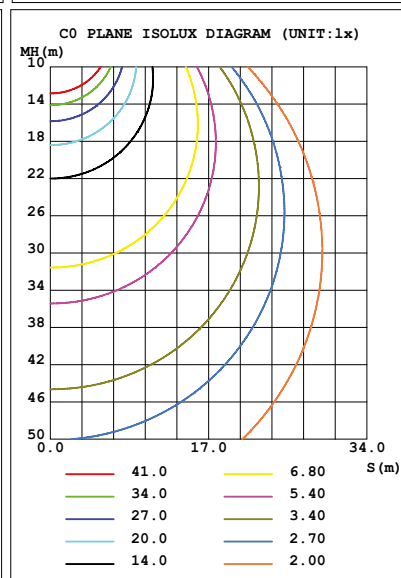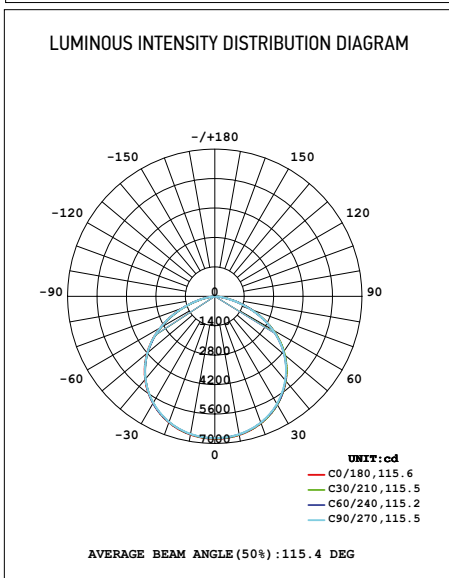



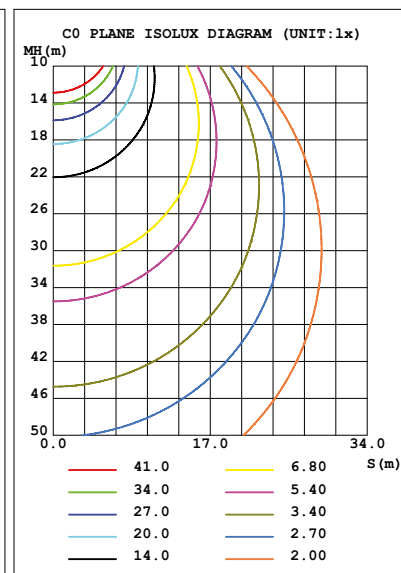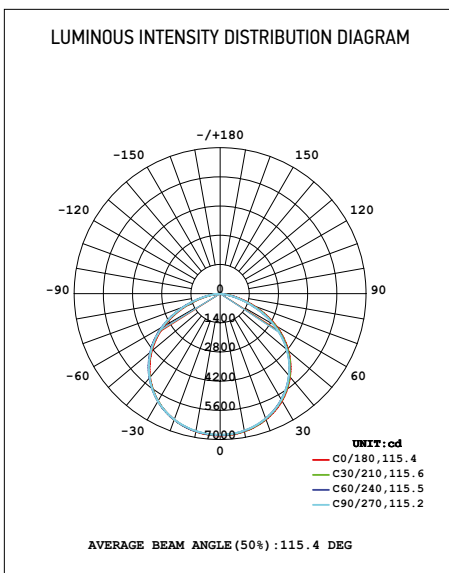

150W | 200~480V



Alcon 11177 LED Half Dome High Bay Light

COMPATIBLE DIMMERS

Manufacturer	Dimmer SKUs
	E610P
	ZS057-D0Z
	NFTV
	LCLC3/D10