

FIXTURE SPECIFICATIONS

Alcon Lighting's Outdoor Linear Wall Wash LED Light is expertly designed for illuminating building facades, signage, and other wall-washing applications. Available in four sizes and five color temperatures (2700K, 3000K, 3500K, 4000K, 5000K), this fixture offers versatile lighting solutions for a wide range of projects. With a variety of optical lens options—including narrow, medium, wide, and elliptical beams—this light can be tailored to meet specific needs. Choose from three premium finishes: white, black, or titanium grey, to seamlessly integrate with any architectural style.

FEATURES

- Construction: Extruded Aluminum
- Color Temperature: 27/30/35/40/50K
- CRI: 90+
- Voltage: 120–277V
- Driver: 0–10V
- Operating frequency: 50/ 60 Hz
- Power Consumption: 9 watt per ft.
- Lumen Output: 100 lumens per watt (35K) Max run: Linkable up to 60 ft.
- Operating Temperature: -40°F to 122°F
- Life: 50,000 Hours
- Listing: ETL Listed, IP66 Outdoor/ Wet Location
- Warranty: 5 years carefree for parts & components (Labor not included).



Alcon Lighting 11245 Outdoor Linear Wall Wash LED Light

Size	Wattage	Lumens
1'	9W	900lms
2'	18W	1800lms
3'	27W	2700lms
4'	36W	3600lms




ORDERING INFORMATION Example:

Model	Length	Optics	Color Temp	Finish	Mounting	Accessories
11245	1 1 ft.	15 15°	27K 2700K	BK Black	ST ² Standard Tilting	LC1 1 ft. Link Cable
	2 2 ft.	20 20°	30K 3000K	WH White		
	3 3 ft.	35 35°	35K 3500K	TG Titanium Grey	ET Extended Tilting	LC3 3 ft. Link Cable
	4 4 ft.	50 50°	40K 4000K			
		WW ¹ 10° x 40°	50K 5000K		F Fixed	LC6 6 ft. Link Cable
					HC6 6 ft. Hardwire Cable	
						HC10 10 ft. Hardwire Cable
						LV Symmetric Anti-Glare Louver


¹For wall wash applications

²Two Standard Tilting brackets are included. Further information in Pg. 3.


LINE DRAWINGS

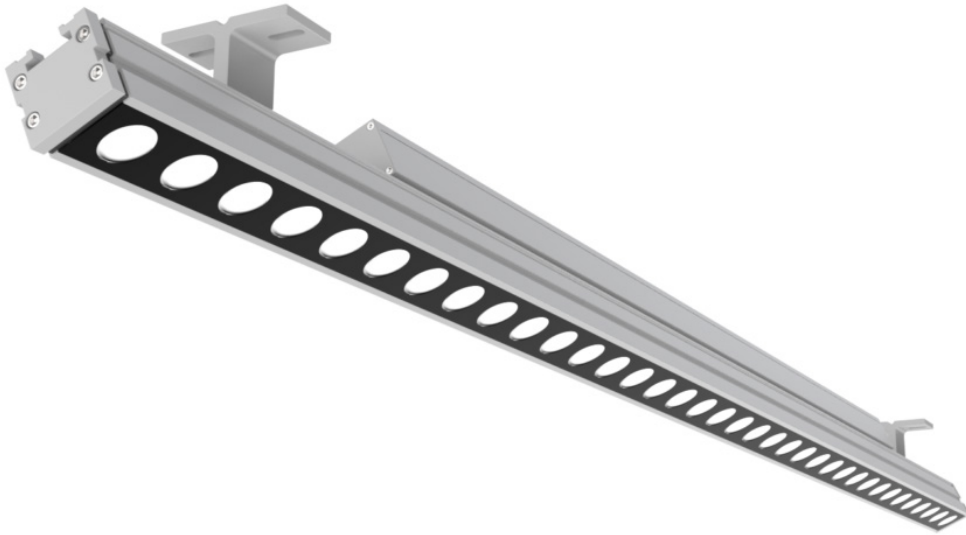


11245-1




11245-2

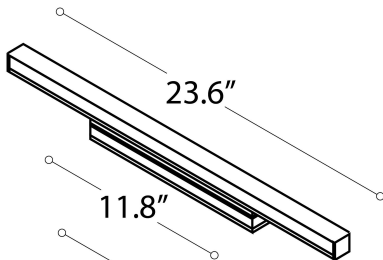


11245-3

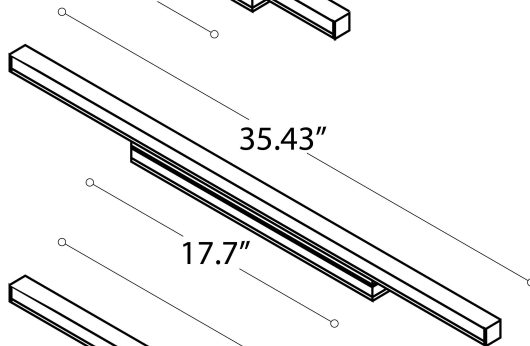


11245-4

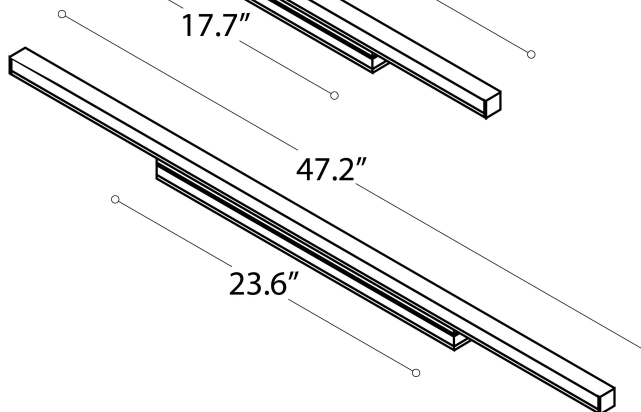


OPTICS



15°




20°



35°



50°




10° X 40°

MOUNTING BRACKETS

Standard Tilting

Included with every Fixture

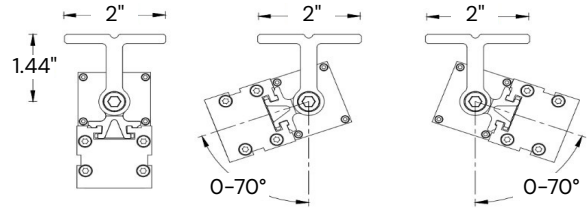


Fixed Mounting

Sold separately



Extended Tilting

Sold separately

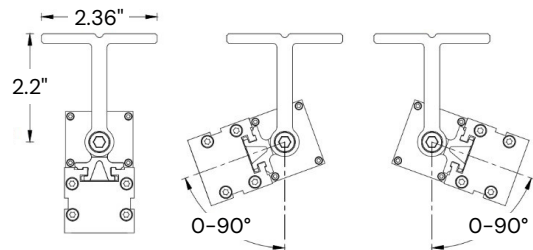

ACCESSORIES

Link Cable

Link extension cable is available in 1 ft., 3 ft., and 6 ft.

LC1
LC3
LC6



Hardwire Cable



Hardwire cable is available in 6 ft. and 10 ft.

HC6
HC10



Symmetric Anti-Glare Louver

LV



COMPATIBLE DIMMERS

			
0-10 V	2100 2101 2102	Diva DTVV	IP-710-DL

Alcon Lighting 11245 Outdoor Linear Wall Wash LED Light

COLOR TEMPERATURE GUIDE



<p>2700K</p> <p>WARM WHITE</p> <p>friendly personal intimate</p> <p>HOMES LIBRARIES RESTAURANTS</p> <p>✓</p>	<p>3000K</p> <p>SOFT WHITE GLOW</p> <p>soft warm pleasing</p> <p>HOMES HOTEL ROOMS LOBBIES RETAIL STORES</p> <p>✓</p>	<p>3500K</p> <p>NEUTRAL GLOW</p> <p>sociable inviting non-threatening</p> <p>EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS</p> <p>✓</p>	<p>4000K</p> <p>COOL WHITE GLOW</p> <p>neat clean efficient</p> <p>OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS</p> <p>✓</p>	<p>5000K</p> <p>DAYLIGHT GLOW</p> <p>bright cool alert</p> <p>GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS</p> <p>✓</p>
---	--	---	--	---