

FIXTURE SPECIFICATIONS

INTENDED USE

The three-inch opening on our diecast 22 gauge steel linear LED light delivers architectural-grade illumination to commercial, hospitality and residential interior space. This downlight, offered in pendant or surface mount, is made with a frosted, snap-in, glare-free lens in the U.S.A. Ideal for today's office and conference room lighting applications.

FEATURES

Construction: Die-cast extruded 22 gauge steel body

Aircraft Cable Length: 144"

Lens: Glare free snap-in frosted lens

Driver: 0-10V Dimming


CRI: 80

Voltage: 120-277V 50/60 Hz

Power Factor: >0.90

Warranty: 1 years carefree for parts & components (labor not included)

Listings: Made in the USA, cETLus

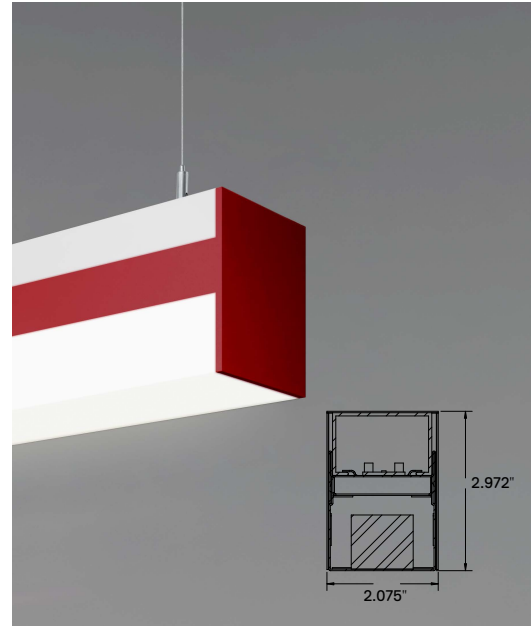

Alcon 12100-2 Architectural 2 Inch Aperture LED Pendant or Surface Mount Light






ORDERING INFORMATION Example: (12100-2-S-2-14-AC4-WH-30K-8)

Model	Mount	Length	Wattage Lumens	Pendant Mounting	Fixture Finish	Mid Strip/End Cap Finish	Color Temp	CRI	Options	
12100-2	S Surface	2 2 Foot	14 14W 2000 lms	(Blank) Not Required	WH White	BK Black	30K 3000K	8 Standard 80+ CRI	EM14 Integral 14W emergency battery backup	
			24 24W 3500 lms	AC4 4ft White Canopy Kit	BK Black	GBK Glossy Black	35K 3500K	9 90+ CRI		
	P Pendant	4 4 Foot	28 28W 4000 lms	AC12 12ft White Canopy Kit	SL Silver	SL Silver	40K 4000K			
			48 48W 7000 lms			BZ Bronze	50K 5000K			
			6 6 Foot	42 42W 6200 lms		IR Iron				
	CR Continuous Run	8 8 Foot	72 72W 12200 lms			YL Yellow				
			56 56W 8000 lms			OR Orange				
			96 96W 14000 lms			RD Red				
						BL Blue				

Available Finishes

Fixture Finishes

	White
	Black
	Silver


Bracket Finishes

	Black
	Glossy Black
	Silver
	Bronze
	Iron
	Yellow
	Orange
	Dark Red
	Red
	Blue




Dimensions


2 Foot

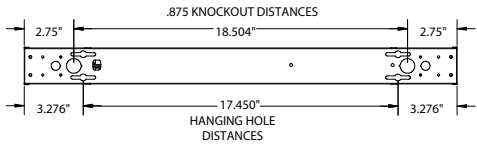


3 Foot

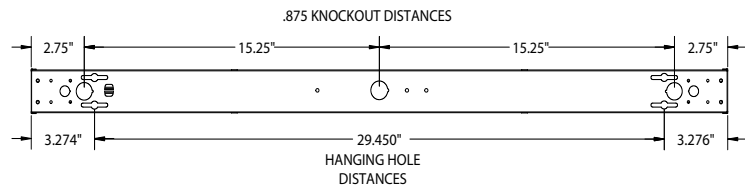


4 Foot

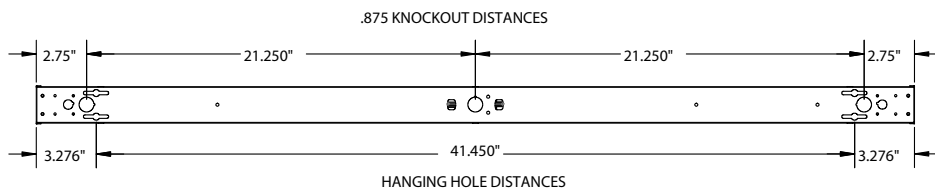

6 Foot

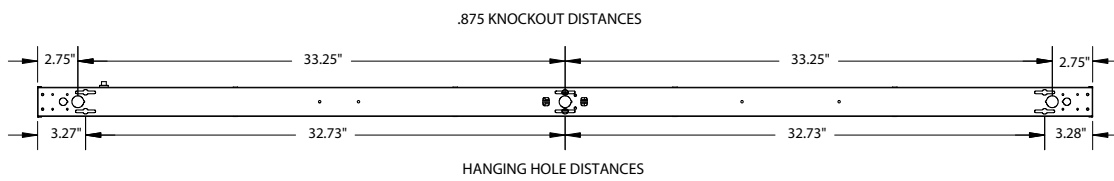

8 Foot

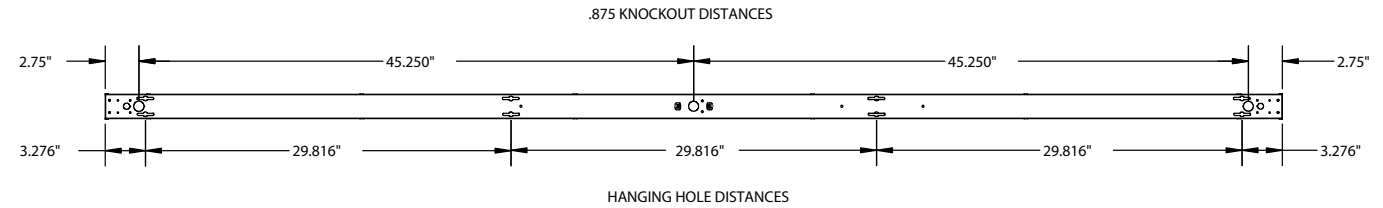

COLOR TEMPERATURE GUIDE



Alcon 12100-2 Architectural 2 Inch Aperture LED Pendant or Surface Mount Light