

Project Name:

Shop Now

FIXTURE SPECIFICATIONS

INTENDED USE

This specification-grade 24V LED wall wash strip light provides clarity in linear lighting to residential, industrial and commercial interiors. Our surface-mount, wall wash grazer is a highly efficient fixture ideal for today's office, hotel or restaurant and retail outlet.

ADDITIONAL FEATURES

Construction: Anodized Aluminum

Finish: Silver

Voltage: 24V LED fixture, 120-277V Triac, ELV, MLV

and 0-10V remote driver

Lens: Glare-free snap-in frosted acrylic for even

distribution Beam Spread: 10° Narrow

CRI: 95+

Usage: Vertical and horizontal wall grazing

Max Single Run: 16 feet

Listings: cULus, Title 24 JA8 Compliant (LED component only), Optional IP65 Rating Available Warranty: 5 years carefree for parts and components (Labor not included). We recommend the use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.












Quantity:

LED Component	Wattage	Lumen	IP Rating	
Dry Location	4W per FT	440L per FT	IP45	
Wet Location	3W per FT	250L per FT	IP65	



ORDERING INFORMATION Example: 12109-4-27K-4N1-WT)

Model		Length	Color Temperature		External Dimming Driver		LED Component	
12109	2	2 Foot	27K	2700K	4N1	TRIAC, ELV,	DY	Dry Location
	3	3 Foot	30K	3000K		MLV & 0-10V Dimming		(IP45)
	4	4 Foot	35K	3500K			WT	Wet Location
	6	6 Foot	40K	4000K				(IP65)
	8	8 Foot	50K	5000K				
	XX	Custom Length ¹						


¹Specify Length in Feet



REMOTE DIMMING DRIVER SPECIFICATIONS

4N1SERIES

Compatible with most TRIAC, ELV, MLV & 0-10V Dimmers

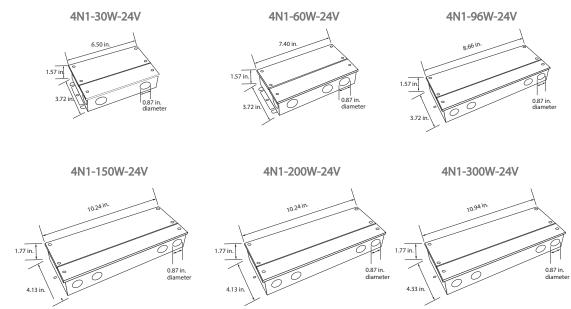



AlconLighting.com © 2023 (877) 733-5236 products@alconlighting.com Rev. 01/19/25 2/2