

Shop Now Project Name: Quantity: Type:

FIXTURE SPECIFICATIONS

INTENDED USE

Available as a pendant, surface or wall mount, our ultra-thin LED fixture features a unique design that provides both energy efficiency and style. Offering field-adjustable color temperature switching, this fixture is suitable for applications such as office, banking, retail and classrooms.

DETAILS

Construction: Extruded aluminum housing. Mounting: Pendant, wall and surface options available. Pendant mounting includes 4FT adjustable aircraft cable.

Finish: White

Color Temperature: Color temperature switch is capable of switching from 3000K/3500K/4000K

Voltage: 120V-277V, 50/60Hz Dimming: 0-10V Dimmable

CRI: 90+


Life: 50,000 Hours

Warranty: 5 years Carefree for parts & components

(Labor not included)

Listings: UL, Damp Location Rated.



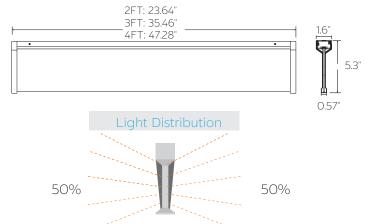







Ordering Information: Example: (12139-P-4-H)

Size	Wattage	Lumen	Delivered Lumen
2FT	20W	2000 lm	2513 lm
3FT	20/30/40W	2000/3000/4000 lm	2509/3804/5097 lm
4FT			2369/3624/4880 lm

Model	Mount	Length Wattage Lumen	Pendant Ceiling Type	9
12139	P Pendant W Wall S Surface Drywall ST1 Surface for T-Grid	2 2FT 20W 2000lm 3 3FT Switchable Wattage Switchable Lumen 4 4FT Switchable Wattage Switchable Lumen	(Blank) Not Required T92 9/16" Grid T-bar T15 15/16" Grid T-bar SC2 Screw Slot H Hard / Dry Wall SH Sloped Hard / Dry Wall	1 Mounting hardware provided. 2 J-box and T-grid clips are included.



