

Project Name: _____

Type: _____ Quantity: _____

[Shop Now](#)


FIXTURE SPECIFICATIONS

INTENDED USE

This architectural-grade, efficient, high-output, high-CRI LED light fixture functions inside a 270° rotating tube, directing light where needed. It's available in 2 foot, 3 foot, 4 foot, 6 foot & 8 foot lengths. The Gladstone pendant or surface-mount linear ceiling or wall light is the go-to, specification-grade commercial LED light fixture choice for architects and lighting designers in applications ranging from offices and schools to dining, hospitality, modern gyms and fitness centers. This product is made in Burbank, Calif., U.S.A.


FEATURES

- Construction:** Matte anodized extruded aluminum driver housing
- Mounting:** Standard 8 ft. gray adjustable power cord and aircraft cables, with push button grippers supplied. Custom length mounting option available.
- Pendant Driver:** Surface mount is standard (Flush mount and remote installation available upon request)
- Input Voltage:** 120/277V, 50/60Hz
- Color Quality:** 90+ CRI
- Dimming:** 0-10V 5-Wire 1% dimming
- Emergency Lighting:** Optional emergency LED driver with remote test switch
- EM Dimensions:** 36" L 3.4" H 4.25" W
- Listings:** cULus listed for damp locations, Made in USA **Warranty:** 1 Year carefree for parts & components (Labor not included)



Lamp rotates 270°, in 15° stepped increments, to direct light where needed.


Surface

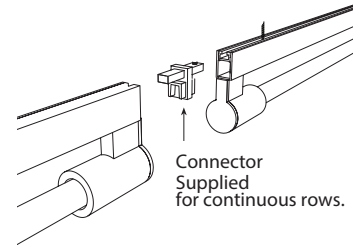


Connector Supplied for continuous rows.

Optional Trims


Perforated Direct

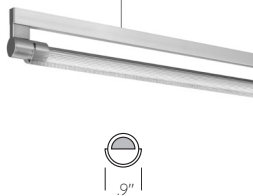


Perforated Direct/Indirect



Louvered Direct/Indirect



Wall Wash



Perforated Wall Wash






ORDERING INFORMATION Example: (12160-P-PD-2-30K-SR-AC8)

Model	Mounting	Trim	Length Wattage Lumens	Color Temp	Pendant Driver	Pendant Cord	Options
12160	P Pendant	Blank <small>Standard</small>	2	30K	SR <small>Standard</small>	AC8 <small>Standard</small>	EM7
		No Trim	2 FT 14W 1443lms	3000K	Surface	8' Adjustable aircraft cable	7W Remote Emergency Back Up Battery
	S ² Surface	PD	3	35K	FL	ACx Custom length adjustable aircraft cable (Max 25')	EM12 12W Remote Emergency Back Up Battery
		Perforated Direct	3 FT 21W 2165lms	3500K	Flush		
		PDI	4	40K	RMT		
		Perforated Direct/Indirect	4 FT 28W 2886lms	4000K	Remote T-Bar		
		LDI	6 ¹		RMW		
		Louvered Direct/Indirect	6 FT 42W 4330lms		Remote Drywall		
		WW	8 ¹				
		Wall Wash	8 FT 56W 5772lms				
PWW	CRXX ¹						
Perforated Wall Wash	Continuous Row						
		Replace XX with Length in Feet					

¹ 6 FT fixture consists of two 3 FT fixtures in continuous row.
² 8 FT fixture consists of two 4 FT fixtures in continuous row.
² Driver is Integrated into railing


FIXTURE DIMENSIONS

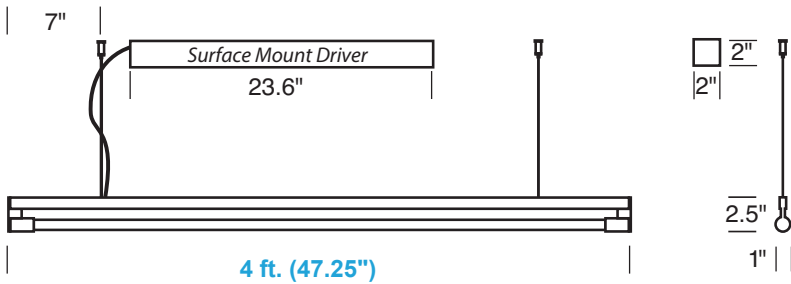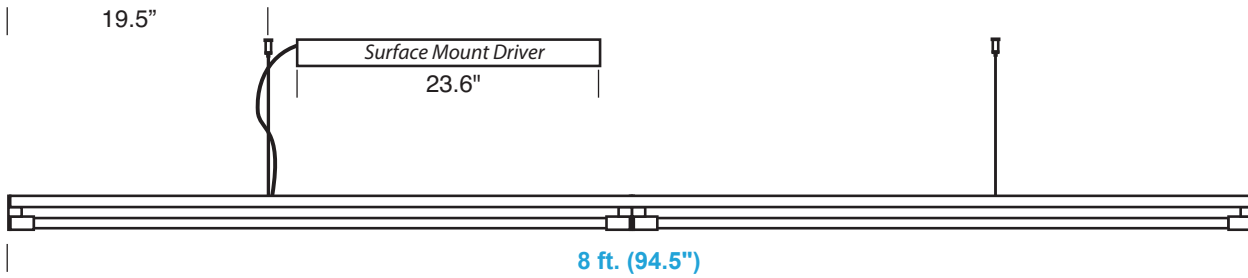


HOUSING DIMENSIONS

Remote T-Bar Housing: Remote housing for T-bar ceiling includes bar hangers.

Dimensions: 27" L 3.4" H 4.25" W

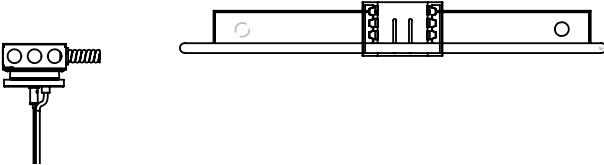


Flush Housing: 22" flush mount ballast housing, for joist mount rough-in.

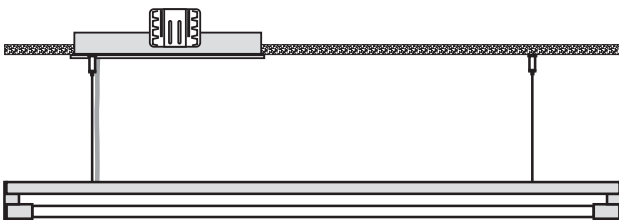

Remote Emergency: Remote EM housing for T-bar ceiling includes bar hangers and remote test switch.

Dimensions: 36" L 3.4" H 4.25" W

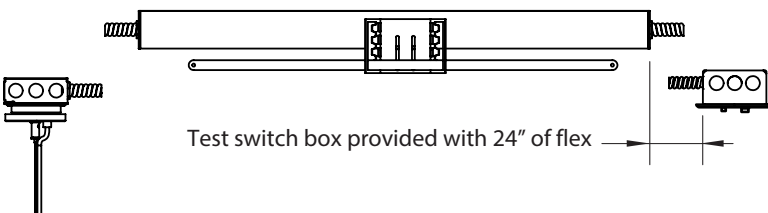

COLOR TEMPERATURE GUIDE

