

FIXTURE SPECIFICATIONS

INTENDED USE

elegant design emitting high Color Rendering Index (CRI) LED light. Our product fits any residential or commercial interior. The modern architectural lighting renders a work or home space with a refined sense of purpose and a warm glow.

FEATURES

Construction: Hand blown glass shade with matte finish faceplate.

Mounting: 6 foot adjustable aircraft cable with 18 AWG adjustable power cord standard.


Finish: Black, Satin Brass or Satin Nickel. Voltage: TRIAC and ELV @ 120 VAC.

CRI: 90+

Voltage: 120/277V, 50/60 Hz

Listing: cUL, Made in USA

Warranty: 5 years carefree for parts & components (Labor not included).

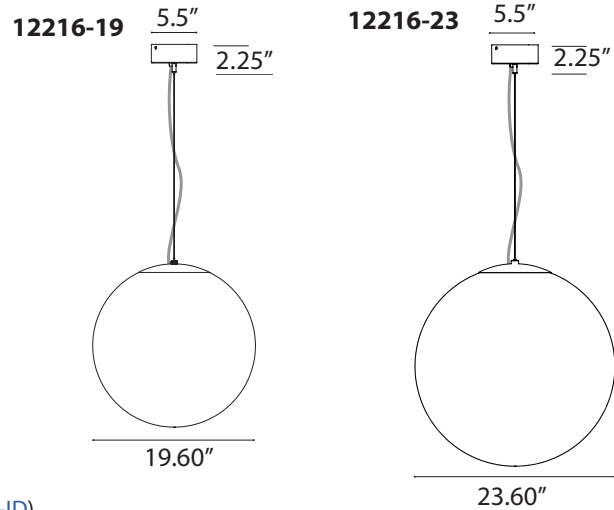

Color Temperature	19" Lumen Output	23" Lumen Output
30K / 35K / 40K	5170L	4800L
RGB + 35K	3500K: 2442L Red: 357L Green: 1906L Blue: 357L Full Color: 4169L	3500K: 1954L Red: 286L Green: 1525L Blue: 286L Full Color: 4169L

ORDERING INFORMATION Example: (12216-19-WH-WH-30K-AC6-010-ID)

Model	Diameter Wattage	Finish	Cord Color	Color Temperature	Pendant Mounting	Driver	Driver Mounting	Options
12216	19 19.60" 48W	WH White	WH White	30K 3000K	AC6 <i>Standard</i> 6' Aircraft Cable	010 <i>Standard</i> 0-10V Dimming	ID <i>Standard</i> Integrated Driver	IEM Integrated Emergency Back Up Battery
	23 23.60" 48W	SL Silver	GY Gray	35K 3500K	AC12 12' Aircraft Cable	LDE1 Lutron Ecosystem Hi-Lume 1%	RD Remote Driver	REM Remote Emergency Back Up Battery
		BK Black	BK Black	40K 4000K	AC25 25' Aircraft Cable	DALI DALI Dimming		EQ Earthquake Bracing Kit
				RGBW ¹ RGB + 3500K		DMX ¹ DMX Dimming		DMX-WC-W ¹ DMX Wall Controller (White)
								DMX-WC-B ¹ DMX Wall Controller (Black)

Alcon Lighting 12216 Suspended Glass Globe Pendant-Mount LED Light




¹ RGBW Must be paired with DMX driver and DMX Wall Controller for proper function.

REMOTE DRIVER

For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box. Must be accessible after installation. Order **RD**.

Remote Driver Dimensions



Remote Driver Canopy

3.80 x 0.45 in.

Max. Wiring Distance (at full load)

Wire Size (AWG)	Distance (ft.)
18	18
16	29
14	46
12	71
10	120



INTEGRATED EMERGENCY

Battery pack provides 10W for 90 minutes. Canopy shown at right. Order **IEM**.

REMOTE EMERGENCY

Battery pack provides 10W for 90 minutes. Includes red light/test switch in handybox. Order **REM**.

Integrated Emergency Dimensions

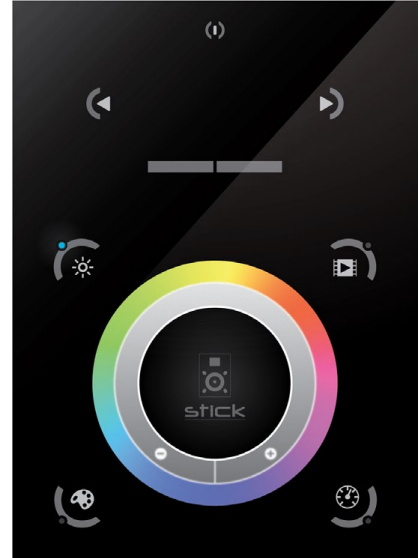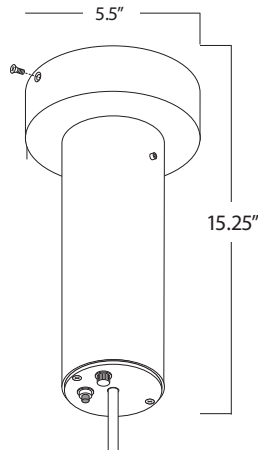

Technical Data for DMX Controller

Input Power	5-15v DC
Output Protocol	DMX512 (x2)
Programmability	PC, Mac, Tablet, Smartphone
Available Colors	Black / White
Connections	USB Type-C, Ether-net, RS232, Clock, 8 relay
Memory	microSD (32Gb Max)
TCP Connections	5
Temperature	-10 °C to 45 °C LIR2032
Battery	Single or double gang wall socket
Mounting	Single or double gang wall socket
Dimensions	5.74"x4.17"x0.43" 146x106x11mm
Weight	247g
Standards	EC, EMC, ROHS, ETL

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X

Alcon Lighting 12216 Suspended Glass Globe Pendant-Mount LED Light