


### FIXTURE SPECIFICATIONS

#### INTENDED USE

The **Vivo Architectural LED Vertical Cylinder Tube Pendant Mount** features an aesthetically pleasing design and RGB color changing options that will enhance any space with a touch of color. The Vivo is an ideal solution for architectural and commercial applications.

#### FEATURES

- Diameter:** 4"
- Lens:** Matte white acrylic diffuser
- Mount:** 8' adjustable power cord
- Voltage:** 24V
- CRI:** 90
- LED Color:** RGB sequencer
- RGB Flexible 5050 tapelights
- Eldo LED Dimmer with Control Included
- 4-Conductor control cable to fixture canopy supplied
- Dimming:** 0-10V 1% dimming, 120/277V standard
- Downlight:** 4" 12V DC MR16 LED
- Downlight Wattage:** 9W
- Listings:** cULus Listed for dry locations only DMX controls meet USITT DMX-512A protocols

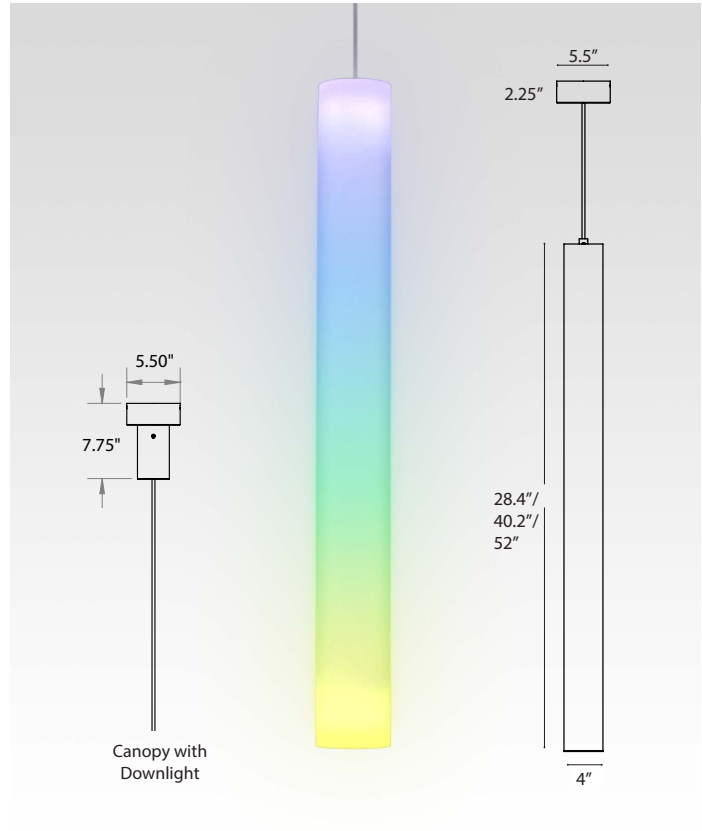

Alcon 12255 Vivo Architectural LED Vertical Cylinder Tube Commercial Pendant Light



#### ORDERING INFORMATION Example: (12255-4-72W-40K-SL)


Model	Size, Wattage, & Lumens	Color Temp	Finish	Dimming	Controls
<b>12255</b>	<b>2-36W</b> 2 FT / 36W / 2100 lms	<b>30K</b> 3000K	<b>SL</b> Silver	<b>010</b> <sup>Std</sup> 0-10V 1% <b>LIN</b> Eldo 4-control channel Dimmable Driver	<b>DTRAX</b> Wall-mounted White DMX Controller
	<b>3-54W</b> 3 FT / 54W / 3100 lms	<b>35K</b> 3500K	<b>WH</b> White		
	<b>4-72W</b> 4 FT / 72W / 4200 lms	<b>40K</b> 4000K			
		<b>R</b> Red			
		<b>B</b> Blue			
		<b>RGB</b> <sup>1</sup> RGB			

<sup>1</sup> Must specify LIN full color dimmable LED driver, and DTRAX wall DMX controller


## LED CANOPY DIMENSIONS

### PENDANT STANDARD

#### No Downlight

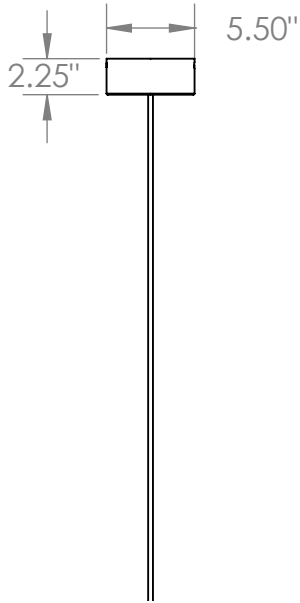


#### With Downlight

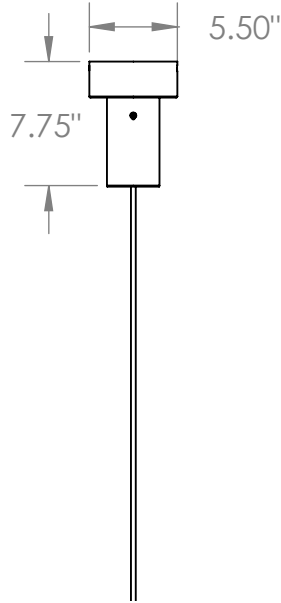


### PIPE MOUNT WITH SWIVEL CANOPY

#### With or Without Downlight

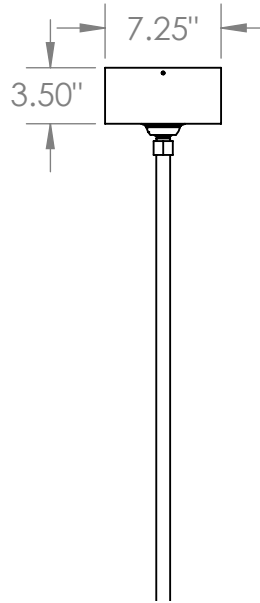


### REMOTE DRIVE OPTION - RD & BDMXMOD


#### Pendant

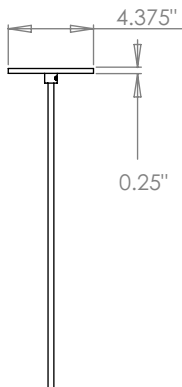

#### Pipe Mount

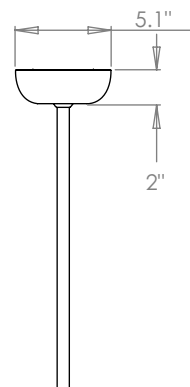

#### Remote Driver Housing

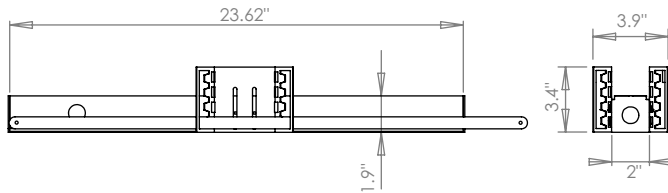

Adjustable bar hanger brackets are removable.

### ELDO FULL COLOR LED DIMMING DRIVER



LINEARdrive DC, 720W, 48V, DMX/RDM and DALI, 4 control channels, constant voltage, 4x LED outputs, plastic long

