

FIXTURE SPECIFICATIONS

INTENDED USE


With the capability to tune color temperature, our simple yet elegant chandelier affords both uplighting and downlighting. Adding versatility to the trading space, such as retailers, as well as conference rooms, offices, hotels and restaurants, the dimmable suspended product yields from 100 to 277 volts. For optimal color control consistency, this product works best within series S.

FEATURES

- Construction:** Seamless Aluminum Frame
- Color Temperature Switch:** Capable of delivering 3000K, 3500K & 4000K Color Temperatures. Color Temperature Tuning (from 3K to 4K), RGBW-3K & RGBW-4K Available. For optimal color control consistency, this product works best within series S.
- Lens:** High Transmittance Acrylic
- Voltage:** 100-277V
- Power factor:** 0.90
- CRI:** 80+
- Dimming:** 0-10V Dimmable
- Life:** 100,000-hour
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** cULus, FCC listed, RoHS compliant, Dry location.



Alcon 12279 Redondo Architectural LED Ring Chandelier

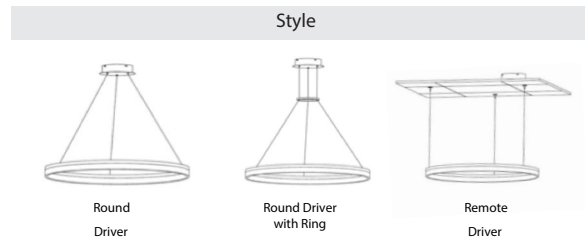


ORDERING INFORMATION Example: (12279-I-1-32-CS-010-WH-AC60-A)


Model	Light Distribution	Rings	Color Temp	Dimming Control	Finish	Mounting	Style	Options
12279	I Inside	1-Tier	CS ^{Standard} Color Temperature Switch 3000K, 3500K & 4000K	010 ^{Standard} 0-10V Dimming	Standard	AC120 ^{Standard} 10 Foot Adjustable Aircraft Cable	A Round Driver	CCT-C Color Temperature Tuning Wall Control <i>More information on Pg 4</i>
		1-32 (32" 40 Watts 2,811 Lumen)						
	O Outside	1-40 (40" 50 Watts 3,475 Lumen)						
		1-48 (48" 60 Watts 3,858 Lumen)						
	2-Tier	1-60 (60" 70 Watts 4,469 Lumen)						
		1-72 (72" 80 Watts 4,652 Lumen)						
	3-Tier	2-32 (32"+ 40" 90 Watts 6,286 Lumen)						
		2-40 (40"+ 48" 110 Watts 7,333 Lumen)						
	4-Tier	2-60 (60"+ 70" 150 Watts 9,121 Lumen)						
		3-32 (32"+ 40"+ 48" 150 Watts 10,144 Lumen)						
	5-Tier	3-40 (40"+ 48"+ 60" 150 Watts 11,820 Lumen)						
		3-48 (48"+ 60"+ 72" 200 Watts 12,979 Lumen)						
	6-Tier	4-32 (32"+ 40"+ 48"+ 60" 200 Watts 15,669 Lumen)						
		4-40 (40"+ 48"+ 60"+ 70" 250 Watts 17,879 Lumen)						
	7-Tier	5-32 (32"+ 40"+ 48"+ 40"+ 32" 200 Watts 16,430 Lumen)						
5-40 (40"+ 48"+ 60"+ 48"+ 40" 380 Watts 19,135 Lumen)								
5-48 (48"+ 60"+ 72"+ 60"+ 48" 340 Watts 21,306 Lumen)								
		RGBW3K ¹ RGBW + 3000K Color Temp	ZB ZigBee Control	SL Silver	AC60 5 Foot Adjustable Aircraft Cable	B Round Driver with Ring	RGB-C RGBW Wall Control <i>More information on Pg 4</i>	
		RGBW4K ¹ RGBW + 4000K Color Temp		BR Oil Rubbed Bronze	AC180 15 Foot Adjustable Aircraft Cable	D Remote Driver	RGB/CCT-R RGBW / Color Temperature Handheld Remote <i>More information on Pg 4</i>	
				OR Orange	AC240 20 Foot Adjustable Aircraft Cable		REMS 5 Watt Remote Emergency Backup Battery	
				YE Yellow			REMS10 10 Watt Remote Emergency Backup Battery	
				RE Fire Engine Red			REMS17 17 Watt Remote Emergency Backup Battery	
				Plated				
				PL Platinum				
				RG Rose Gold				
				BG Burnished Gold				

¹ Must be paired with DMX or ZigBee Driver





1 TIER

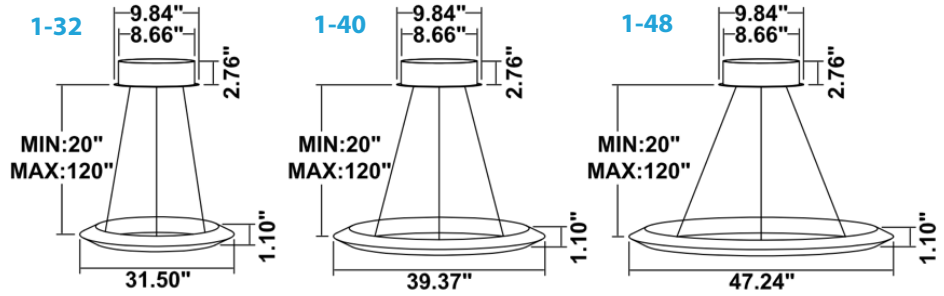



2 TIER

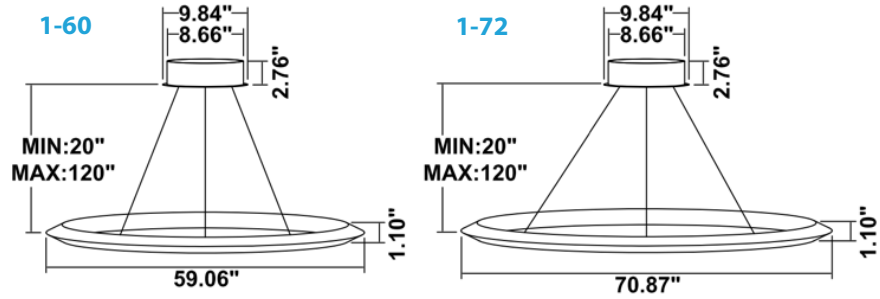




3 TIER

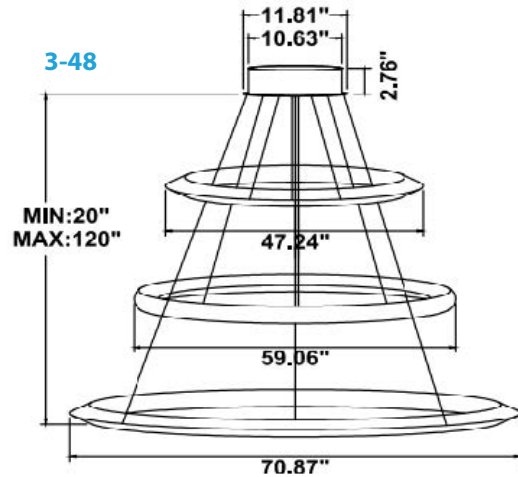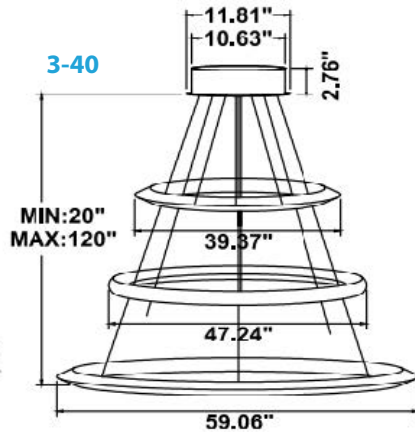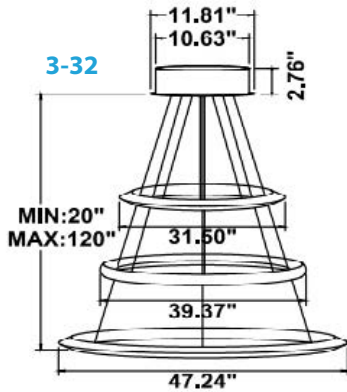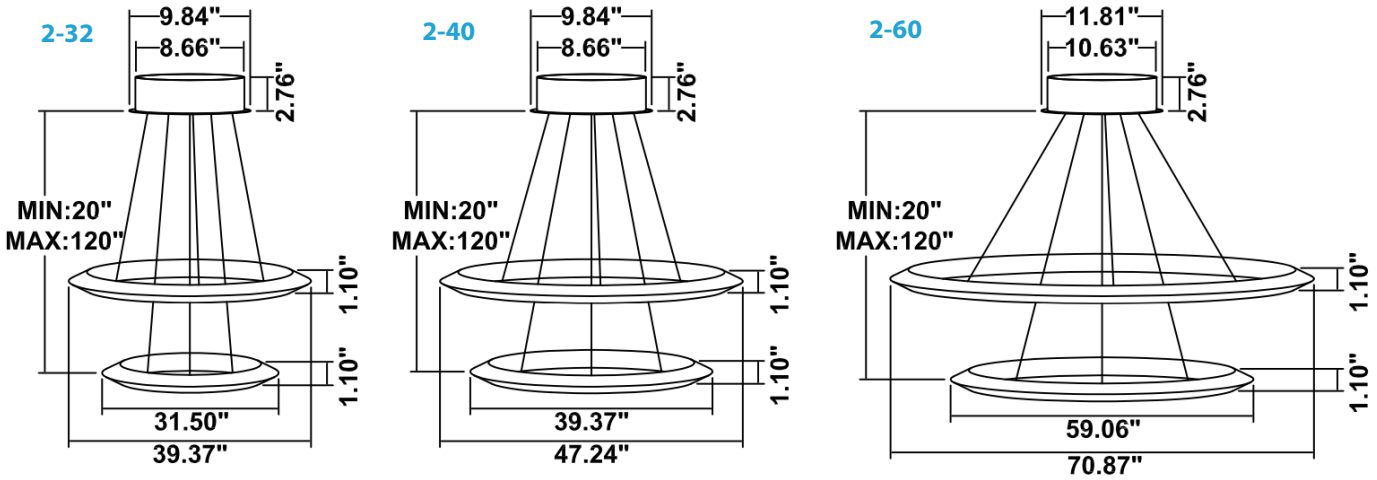

4 TIER

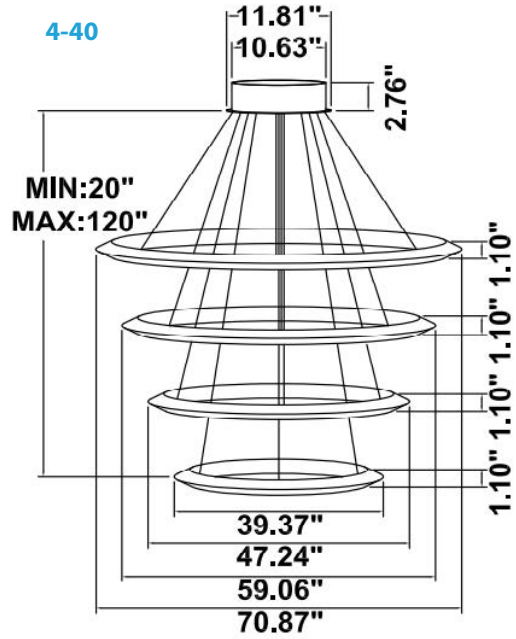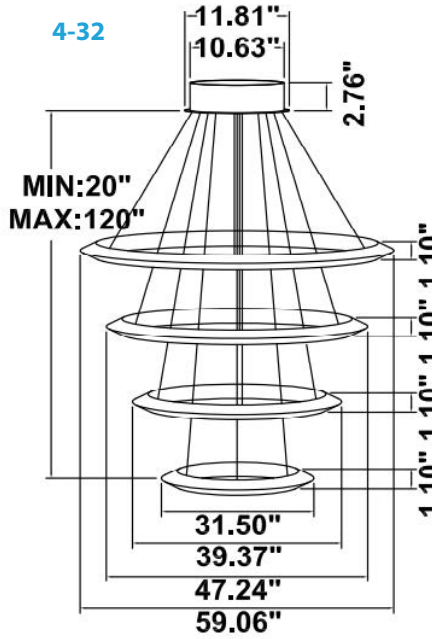

5 TIER

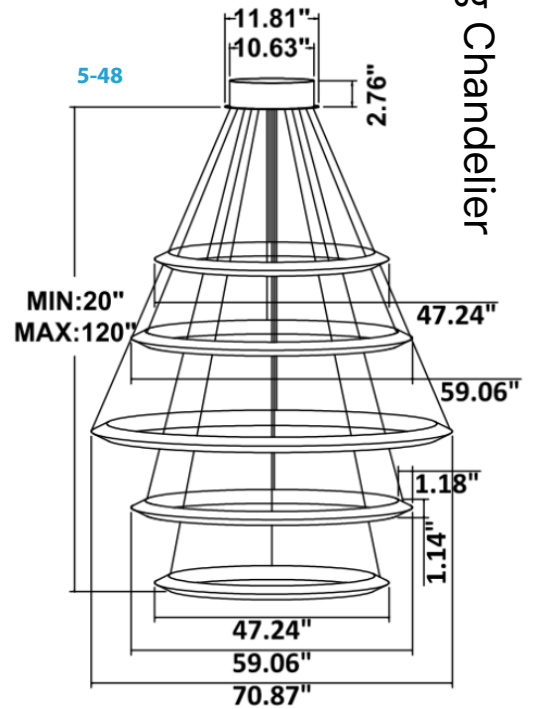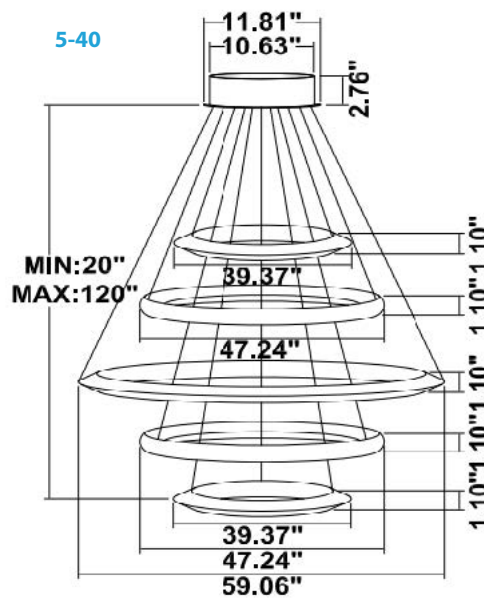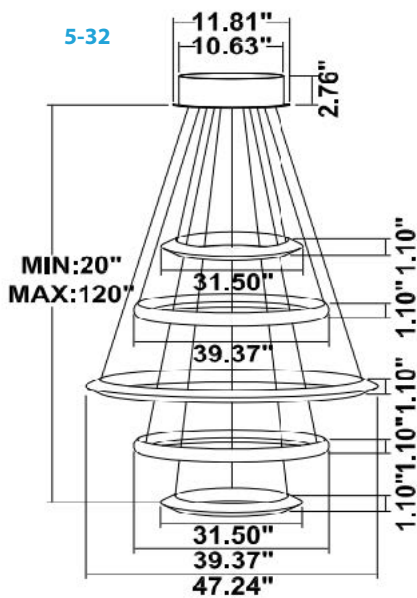

Alcon 12279 Redondo Architectural LED Ring Chandelier

Control	DMX Compatible	ZigBee Compatible
 <p>CCT Wall Control</p>	✓	✓
 <p>RGBW Wall Control</p>	✓	✓
 <p>RGBW/CCT Handheld Remote Control</p>	✗	✓
 <p>Alexa Echo Plus, Google Home & other smart Speakers <i>Device must be Zigbee 8.0 Compatible</i></p>	✗	✓
 <p>iOS / Android Application <i>Alexa Echo Plus, Google Home or other ZigBee 8.0 Compatible smart speaker needed for operation</i></p>	✗	✓