

Project Name: _____ Type: _____ Quantity: _____




[Shop Now](#)

FIXTURE SPECIFICATIONS

This architectural-grade recessed wattage selectable LED troffer is available in 2' X 2' and 2' X 4' dimensions for a maximum 7,000 lumen output. The indirect LED light reflects off of the contemporary lens design to bounce back as downlight. The 120-277V troffer is ideal for commercial applications including office buildings and medical facilities. Wattage selectable switch offers 21, 28, and 32 watts.

FEATURES

- Construction:** Cold Rolled Steel
- Optics:** Transparent Vertical Fin
- Finish:** White
- Voltage:** 120-277V 50/60 Hz Constant Current
- Dimming:** 010V Dimming
- CRI:** 80+
- Life:** 70,000 Hrs
- Operating Temperature:** -4°F ~ 130°F (-20°C ~ 55°C)
- Listing:** cULus, DLC
- Warranty:** 7 Years Carefree for Parts & Components (Labor Not Included)

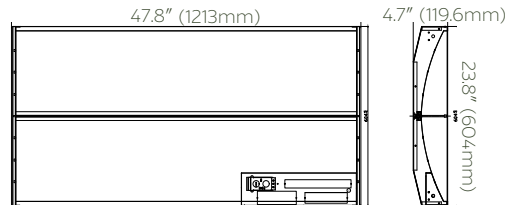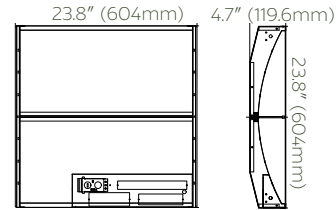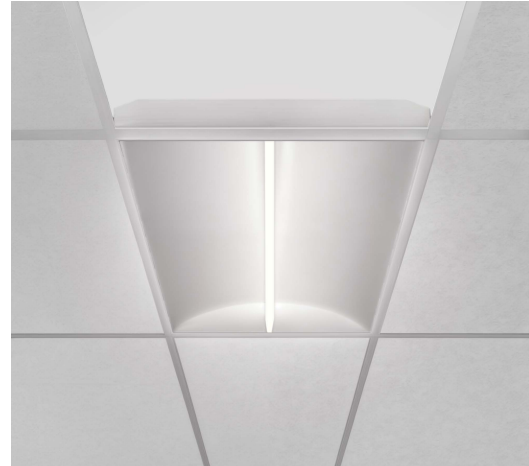

Size	Wattage	Lumens
2' x 2'	21W, 28W, 32W	2310lms, 3080lms, 3520lms
2' x 4'	35W, 50W, 64W	3850lms, 5500lms, 7040lms

ORDERING INFORMATION Example: (14010-22-35K)

Model	Size	Color Temperature	Options
14010	22 2x2	35K 3500K	7EM 700lms Emergency Backup 14EM
	24 2x4	40K 4000K	EmergencyBackup 20EM
		50K 5000K	Emergency Backup

Wp01 A 2 dfo

dRy000R ~

• 00 »

® h®N®Y® x®

,:0® A®Y®i (\$ \$ P

0M 2 öni p00®

0M 2 öni p00®

0M 2 öni p00®

0M 2 öni p00®