

FIXTURE SPECIFICATIONS

INTENDED USE

The Alcon Lighting Prestige LED Side Basket Troffer is designed and configured to provide soft ambient lighting that is asymmetrically distributed to reduce shadows and glare. The Prestige is ideal for in commercial and industrial interiors such as schools, hospitals, warehouses and office lighting applications.

AVAILABLE SIZES

2x2 | W 23.93" x L 23.75" x D 5.5"

2x4 | W 23.93" x L 47.75" x D 5.5"

1x4 | W 11.94" x L 47.75" x D 5.5"

FEATURES

Construction: Die-formed, cold-rolled, heavy gauge steel housing;
 Corrosion Resistant; IC Rated
 Finish: White powder coated
 Reflectors: Textured matte white
 Lens: White acrylic lens and perforated metal basket
 Mounting: Recessed mount in expose T-Bar ceilings Suitable for direct insulation contact
 Voltage: 120-277V (50/60 Hz) Constant Current Dimming: 0-10V Dimming
 Life: 100,000 Hours

CRI: 80+

Operating Temperature: -4°F ~ 122°F

Power Factor: >0.95

THD: <20

Listings: Suitable for Damp Locations, UL/CUL Listed and Labeled,

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)




Alcon 14080 Prestige Architectural LED Recessed Side Basket Direct Light Troffer

ORDERING INFORMATION Example: (14080-22-36-30K-GR)


Model	Size	Wattage Lumens	Color Temperature	Trim Type	Options	
14080	22 2x2	<small>2x2 Options</small> 36 36 watts, 2133 lms	30K	GR	EM8	
		54 54 watts, 3161 lms	3000K	Grid	8W Emergency Backup Battery	
	24 2x4	<small>2x4 Options</small> 36 36 watts, 2133 lms	35K	FK	EM15	
		54 54 watts, 3161 lms	3500K	Flange ¹	15W Emergency Backup Battery	
		72 72 watts, 4214 lms	40K		EM20	
	14 1x4	<small>1x4 Options</small> 36 36 watts, 2133 lms	50K		20W Emergency Backup Battery	
		54 54 watts, 3161 lms	5000K		ARRA	
						Assembled in USA for Buy American act

¹ Flange kits are supplied in separate boxes, field installed.

FIXTURE DIMENSIONS

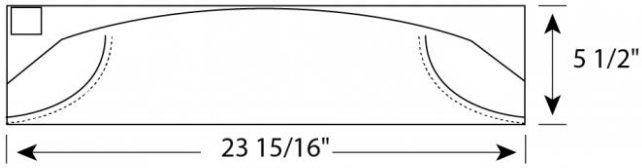

2x2
2x4



1x4