

## FIXTURE SPECIFICATIONS

### INTENDED USE

The specification grade Basic Architectural LED Recessed Troffer fixtures bring clean lines and clear light to commercial LED or residential office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

### AVAILABLE SIZES

**2x2** | W 11.75" x L 24" x H 4"

**2x4** | W 23.75" x L 24" x H 4"

**1x4** | W 11.75" x L 48" x H 4"

### FEATURES

**Construction:** Die-formed and embossed code 22 gauge steel housing Access plate to simplify installation

**Finish:** High reflectance baked white enamel

**Lens:** Clear 0.10 thick A12 Acrylic

**Voltage:** 120-277V (50/60 Hz) Constant Current

**Support:** Recessed Inverted T-Bar Ceilings. Grid Mount.

**Life:** 50,000 Hrs


**CRI:** 80+

**Operating Temperature:** -4°F~122°F

Lamp Included

**Listings:** UL Listed

**Warranty:** 5 Years Carefree for Parts & Components  
(Labor Not Included)

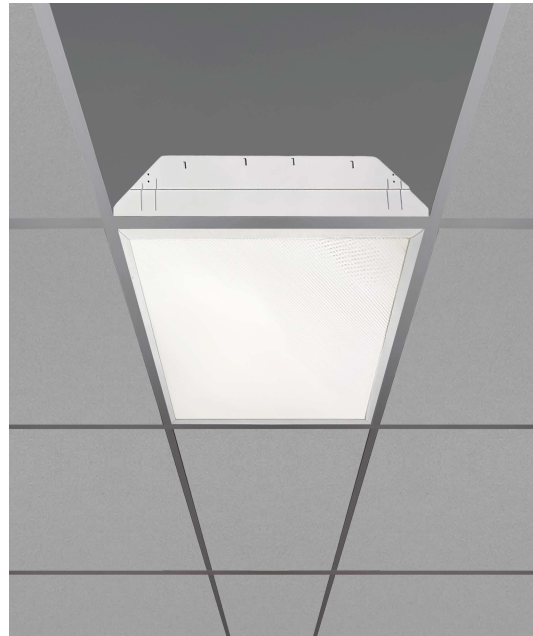

## ORDERING INFORMATION Example: (14115-22-30K-ND)

Model	Size	Wattage   Lumens	Color Temperature	Dimming	Options
14115	22 2x2	<small>2x2 Options</small> <b>24</b> 24 Watts   2700lms	<b>30K</b>	<b>ND</b> Non-Dimming	<b>EM</b> Emergency Backup Battery
		<b>28</b> 28 Watts   3200lms	3000K		
		<b>35</b> 35 Watts   3900lms	<b>35K</b> 3500K		
	24 2x4	<small>2x4 Options</small> <b>35</b> 35 Watts   4600lms	<b>40K</b> 4000K	<b>DM10</b> 5-Wire 0-10V Dimming (100%-10%)	
		<b>40</b> 40 Watts   5300 lms	<b>50K</b> 5000K		
		14 1x4	<small>1x4 Options</small> <b>35</b> 35 Watts   4300 lms		<b>DM1</b> 5-Wire 0-10V Dimming (100%-1%)
	<b>48</b> 48 Watts   5800 lms				

FIXTURE DIMENSIONS

