

Project Name:

Type:

Quantity:



FIXTURE SPECIFICATIONS

INTENDED USE

Available as a pendant, surface or wall mount, our ultra-thin LED fixture features a unique design that provides both energy efficiency and style. Offering field-adjustable color temperature switching, this fixture is suitable for applications such as office, banking, retail and classrooms.

DETAILS

- Construction:** 22 ga. cold rolled steel welded housing
- Finish:** White antimicrobial finished housing and door frame
- Mounting:** Pendant, wall and surface options available. Pendant mounting includes 4FT adjustable aircraft cable.
- Voltage:** 120V-277V, 50/60Hz
- Dimming:** 0-10V Dimmable
- CRI:** 80+
- Life:** 50,000 Hours
- Power Factor:** ≥ 0.9
- Total Harmonic Distortion:** ≤ 20%
- Warranty:** 5 years Carefree for parts & components (Labor not included)
- Listings:** cULus, Suitable for Damp Location, California Title 24, RoHS, Made in the USA

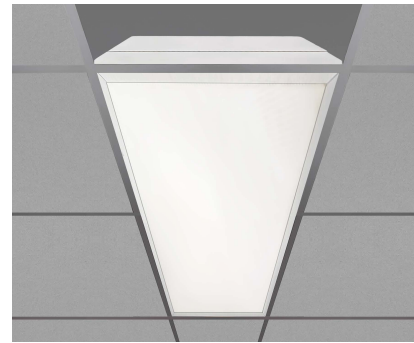

CANDLEPOWER			
ANGLE	END	45	CROSS
0	3619	3619	3619
5	3563	3532	3545
15	3486	3522	3534
25	3225	3265	3280
35	2627	2605	2573
45	1645	1556	1471
55	763	711	666
65	307	274	244
75	126	101	73
85	73	45	11
90	30	14	2
95	18	10	2
105	23	10	1
115	23	10	2
125	20	10	2
135	16	8	2
145	10	7	1
155	6	7	0
165	7	4	0
175	1	0	0
180	0	0	0


ZONAL LUMEN SUMMARY			
DEGREES	LUMENS	% LAMP	% FIXTURE
0-30	2844	33.2	41.8
0-40	4479	52.3	65.8
0-60	6324	73.8	93
0-90	6743	78.7	99.1
90-120	35.5	0.4	0.5
90-150	55	0.7	0.8
90-180	59	0.7	0.9
0-180	6802	79.4	100

Luminaire Output= 6802 lm  
Luminaire Efficacy = 105 lm/W

SPACING CRITERION	
ALONG	ACROSS
1.19	1.19

**14129-64-40-CA**

TYPE = 48 LED MODULE NO.  
CRI = 80  
L70(Hrs.) = 50,000  
PHOTOMETRY TYPE = C

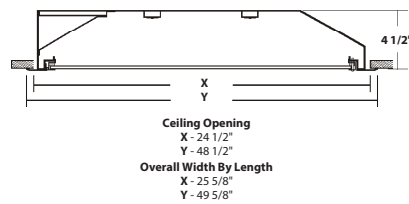

Ordering Information: Example: (14129-64-40-CA)

Model	Wattage   Lumen	Color Temp	Lens	Options
<b>14129</b>	<b>2</b> 15 Watts   1820 Lumen	<b>30</b> 3000K	<b>CA</b> Clear Prismatic Acrylic <b>HICA</b> High Impact Clear Prismatic Acrylic <b>FA</b> Frosted Prismatic Acrylic	<b>WL</b> Wet Location <b>TP</b> Tamper Proof Screws (Hex Socket with Post) <b>GSKN3</b> Three-Way Gasket <b>EM10</b> 10W Emergency Back-up Battery Pack
	<b>4</b> 30 Watts   3561 Lumen	<b>35</b> 3500K		
	<b>6</b> 47 Watts   5752 Lumen	<b>40</b> 4000K		
	<b>8</b> 64 Watts   6802 Lumen	<b>50</b> 5000K Color		
	<b>12</b> 105 Watts   9724 Lumen	<b>TW</b> Tunable White (2700K - 6500K)		