

FIXTURE SPECIFICATIONS

INTENDED USE

Lighting for accent, display, toe-kick, wall wash, coves and under cabinets with a high lumen output and integral driver is easier with our architectural-grade lightbar, which includes a color temperature switch. For uplighting, suits residential and commercial purposes. Our plug-and-play LED lightbar is dry and damp-listed. There's dimmable lighting with a run length that's linkable up to 400 watts. Color Rendering Index (CRI) is 90-plus.

FEATURES

Mounting: Product comes with 90° swivel bracket, 1 mini coupling & clips included **Finish:** White is standard. Bronze is available

Dimensions: 1.1" width x 0.94" height

Voltage: 120V

Lumens: 750 lumens per foot

Wattage: 10W per foot

Color Temperature: 3000K/3500K/4000K selectable switch

Dimming: ELV / TRIAC

Max Run Length: Linkable up to 400W. Includes seamless connector. **Operating Temperature:** -10°C ~ 40°C


CRI: 90+

Life: 50,000


Warranty: 5 years carefree for parts & components. (Labor not included) **Listings:** cETLus, Title 24/JA8, Energy Star



Under Cabinet Lighting Application

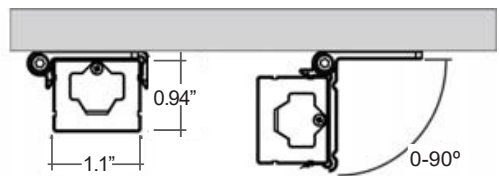

Cove Lighting Application

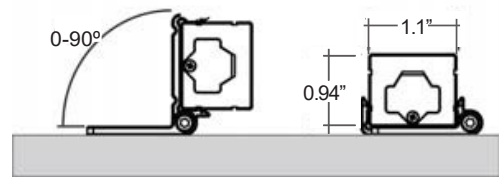

Alcon 14220 Linear 120-Volt LED Cove Lightbar

MODEL	14220-12	14220-16	14220-24	14220-32
LENGTH	12"	16"	24"	32"
WATTS	10 W	13 W	20 W	26 W
LUMENS	750lms	950lms	1500lms	2000lms




ORDERING INFORMATION Example: (14220-24-BR-PF)

Model	Length	Finish	Accessories
14220	12 12 Inches	WH Standard	View page 2 for color options
	16 16 Inches	White	JB Junction Box ¹
	24 24 Inches	BR	HC 72" Hardwire Connector
	32 32 Inches	Bronze	PF 72" Power Feed Cable
	CS Custom Length		ICxx ² Interlink Cable
	Specify Length in Inches		

¹ Junction Box Dimensions: 6-1/4" x 3-5/8" x 1"
² Please specify length, see pg. 2

ACCESSORIES

JUNCTION BOX | [Direct Wire Junction Box With Switch](#)
Dimensions: 6-1/4" x 3-5/8" x 1"

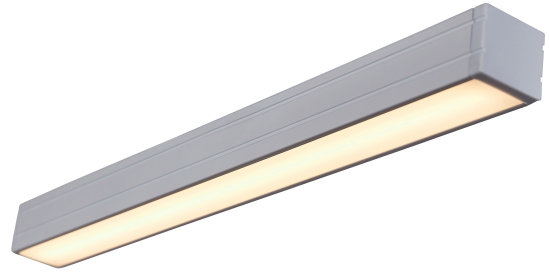

HARDWIRE CONNECTOR | [Hardware connector for LBR Series](#)

72" Cable



POWER FEED CABLE | [AC Direct Plug-in Cable](#)

72" Cable



INTERLINK CABLE | [Allows LBR fixtures to link Together](#)

-6 6" Interlink Cable

-12 12" Interlink Cable

-24 24" Interlink Cable

-72 72" Interlink Cable

