

## 11222 INSTALLATION INSTRUCTIONS

---

### IMPORTANT INSTALLATION NOTES & WARNINGS

#### Compliance & Qualified Personnel

- Installation must follow all applicable local, state, and NEC electrical codes.
- If unsure about any part of the installation, consult a qualified electrician or electrical contractor.

#### Electrical & Fire Safety

- Risk of fire or electrical shock: install this kit only in compatible recessed cans as specified.
- Do not expose wiring to sharp edges or sheet metal to prevent damage or abrasion.
- Ensure proper branch circuit conductors are used—consult a qualified electrician if needed.
- Seal the edge of the wall plate where it meets the mounting surface with latex waterproof caulking to prevent water intrusion into the outlet box (per NEC and UL requirements).

#### Dimming Compatibility

- Designed to work with most standard incandescent or low-voltage electronic dimmer switches.
- Performance may vary—refer to the product specification sheet for recommended dimmers.

#### Environmental Ratings

- Suitable for damp locations.
- Suitable for wet locations only when the top cover (K) is properly assembled.
- Always install within the ambient temperature range specified in the product documentation.

### CAUTION

- ➔ Before beginning installation, carefully read all instructions and turn off power at the main circuit breaker.
- ➔ Do not create or modify open holes in the enclosure of any wiring or electrical components during installation.
- ➔ This product must be installed in accordance with applicable electrical codes by a qualified professional familiar with the construction, operation, and associated hazards of this fixture.

**WARNING:** Risk of fire or electric shock. Installation requires expertise in LED lighting fixture electrical systems. If unqualified, do not attempt installation—contact a certified electrician.

## 11222 INSTALLATION INSTRUCTIONS

**CAUTION:** Glass components are fragile. Handle with care to avoid breakage.

### Installation Steps:

#### Mounting the Plate



1. Fasten the mounting plate (A) to the outlet box (B) using the mounting screws (C) provided with the outlet box. Thread the green ground screw (D) into the designated hole on the mounting plate (A).

#### Wiring the Fixture

2. Connect the fixture wires (E) to the supply wires (F) following the wiring diagram. Ensure all connections are secure and comply with local electrical codes.

#### Securing the Fixture

3. Slide the fixture assembly (G) over the mounted plate (A). Align and secure it using the screw(s) (H). Use wrench (J) to tighten the set screw firmly.

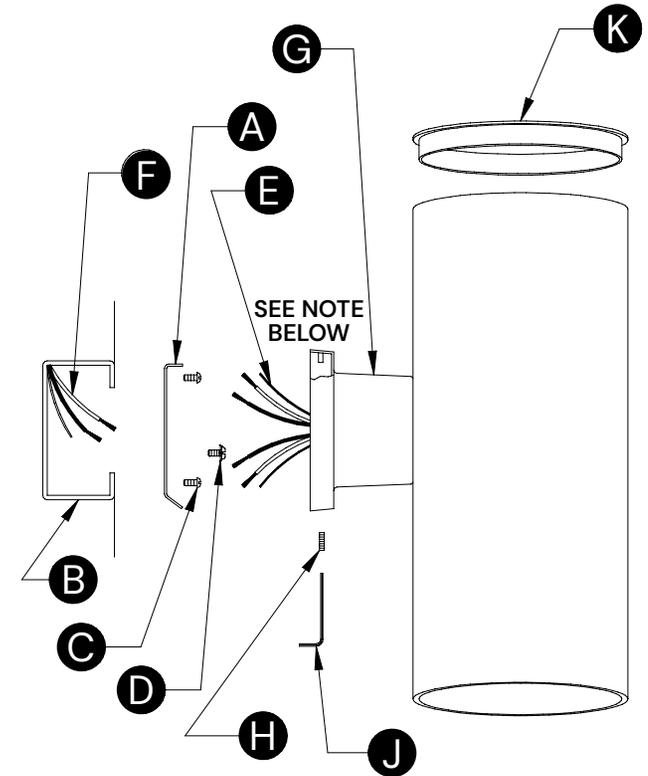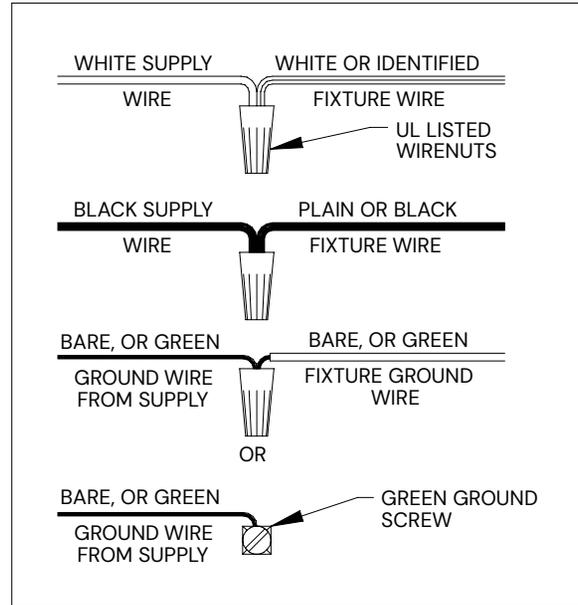

**NOTE:** For up/down light models, wiring connections may be joined for single-switch operation or separated to allow control via two switches.