

NOTES:

1. Output voltage in table 1 with 240VAC applied and fully loaded.
2. Maximum no load input current : 0.07A
3. Enclosure Temperature does not exceed 55°C in a 40°C ambient, fully loaded.
4. The actual transformer 20VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output terminals are terminal block.
7. The transformer uses a class B (130°C) UL recognized insulation system E164279 MD.N66.130.00.
8. The transformer has a thermal self-reset 1.5 A circuit breaker on the secondary side and 0.8A on the primary side.
9. Wiring compartment has 2 side knockouts sized for 3/4 inch screw cable connectors.
10. The removable wiring compartment is secured in place by clips and one screw.
11. The enclosure is black powder coated.
13. The transformer is class 2 cETLus listed control number is 4005509.
13. The label contains Technomagnet's catalog number and electrical rating.

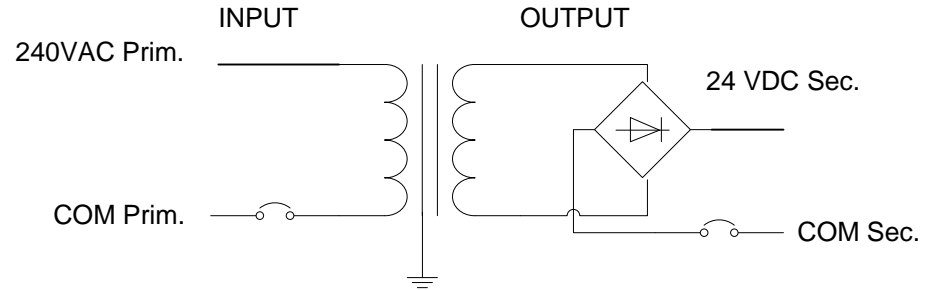


Table 1.

| Output Volts | |
|--------------|--|
| 120AC | |
| 23.6DC | |

| | | | | | |
|-----------------------|--|---|--|--|-----------------|
| | | 15547 Cabrito Road Unit A Van Nuys, CA 91406 | | | |
| | | | | Interactive Lighting Servers | |
| DRW. | | | | Page 1 | Scale: no scale |
| CHK. | | | | Of 1 | Tolerance: ± |
| APR. | | | | Title: | |
| Part #TMC20S24DC240EU | | | | Rev. A | |
| | | | | Compact indoor 24VDC 20VA Low voltage Transformer. | |