


1-1/8" square rectilinear LED luminaire for remote driver operation

Project: _____ Type: _____

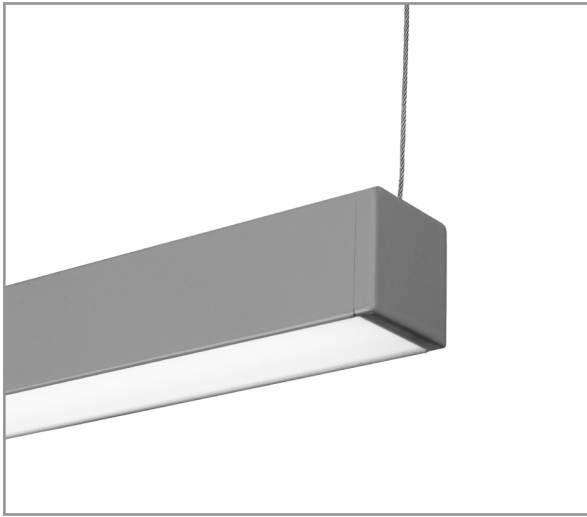

FEATURES

The Grom series GRM10 is a miniature, linear architectural luminaire for general lighting use. The 1-1/8" square extruded aluminum fixture is available for surface or cable mounting. Multiple remote driver options, 90+ CRI color temperatures, light outputs and finishes broaden application possibilities.

SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, extruded acrylic lens and machined aluminum end caps

Model variations offered for surface and cable suspended applications

Standard finishes as shown below

Surface mount models install with spring clips, are wired with 10' low voltage leads and available with back or end feed options

Included standard remote 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available)

Remote mounted emergency battery backup available (ordered separately, consult factory for details)

Standard outputs are 350 and 600 lumens per foot


LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical

Life: 50,000 hours L70

Limited five year warranty

UL and C-UL listed for dry and damp locations

SECTION

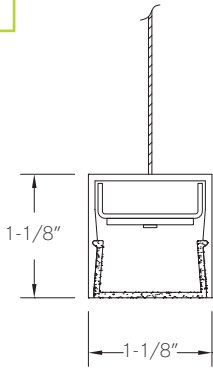

PERFORMANCE

| NOMINAL LENGTH | OUTPUT | LUMENS/ft. | WATTS/ft. | LUMINAIRE LUMENS | EFFICACY (LPW) |
|----------------|------------|------------|-----------|------------------|----------------|
| 4' | R: regular | 350 | 4.3 | 1296 | 81 |
| | H: high | 600 | 7.9 | 2216 | 76 |

Note: All data reflects fixture with 3500K LEDs

GET A QUOTE >



GRM10 -

| NOMINAL FIXTURE LENGTH* | CORRELATED COLOR TEMPERATURE | REMOTE DRIVER | LENS | MOUNT | RUN CONFIGURATION | FINISH |
|-------------------------|------------------------------|--|---------------------------------------|---|-------------------|--|
| 23: 22-5/8" | 27: 2700K-90+ CRI | ND: non-dimming | A: flush lens | S1: surface mount back feed (SN only) | SN: single | AW: architectural white (semi-matte) |
| 28: 28-1/8" | 30: 3000K-90+ CRI | [Dimming] | | S2: surface mount end feed (SN only) | ST: starter | WH: white (semi-gloss) |
| 34: 33-5/8" | 35: 3500K-90+ CRI | D: 0-10V, 1% | LIGHT OUTPUT (lumens per foot) | C4: cable mount 4' cable length | AD: adder | BL: black (semi-matte) |
| 39: 39-1/8" | 40: 4000K-90+ CRI | HES: Lutron EcoSystem, soft-on/fade-to-black, 1% | R: regular - 350 | C8: cable mount 8' cable length | TR: terminator | MB: matte black |
| 45: 44-5/8" | | H2: Lutron Hi-lume 2-wire forward phase, 1%, (120V ONLY) | H: high - 600 | CF: consult factory for custom mounting | | ESS: environmental satin silver |
| 50: 50-1/8" | | E5: Lutron EcoSystem 5-Series, 5% | CF: consult factory for custom output | | | BZ: bronze |
| 56: 55-5/8" | | EL: eldoLED ECOdrive 0-10V, 1% | | | | PR: primer |
| 61: 61-1/8" | | | | | | CF: consult factory for custom finish |
| 67: 66-5/8" | | | | | | SA: satin anodize (may require additional lead time) |
| 72: 72-1/8" | | | | | | |
| 78: 77-5/8" | | | | | | |
| 83: 83-1/8" | | | | | | |
| 89: 88-5/8" | | | | | | |
| RUN # | | | | | | |

Note: Each fixture includes a remote driver matched for fixture length and light output

* Actual dimension dependent on run configuration

‡ Specify run length to the nearest 1". Factory will configure using the least quantity of fixtures as close to the desired run length as possible. Run to be confirmed with a shop drawing.

MOUNTING

| | ORDERING CODE | DESCRIPTION |
|--|---------------|--|
| | S1 | <p>SURFACE MOUNT – BACK FEED</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • Available for Single (SN) fixtures only • 10' low voltage leads exiting from the fixture back at an end • One pair spring mounting clips for horizontal mounting (natural finish, requires #6 flat head screws by others) |
| | S2 | <p>SURFACE MOUNT – END FEED</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • Available for Single (SN) fixtures only • 10' low voltage leads exiting from the fixture end • One pair spring mounting clips for horizontal mounting (natural finish, requires #6 flat head screws by others) |
| | C4 and C8 | <p>CABLE MOUNT</p> <p>Mounting option includes:</p> <ul style="list-style-type: none"> • \varnothing 1/32" x 48" (C4) or 96" (C8) aircraft cables • 60" (C4) or 108" (C8) low voltage cable (in coordinating finish) • Bracket bars • \varnothing 5" white canopies • Canopy mount cable grippers |